

hopson

Tel: 0086-574-88225902 Fax: 0086-574-88225901 E-mail: sales@chinahopson.com Add: 4th Floor, Bona Plaza, No. 456 Taikang Rd., Yinzhou, Ningbo 315100 China www.chinahopson.com





hopson

Company Vision: Committed to become the world's respected leader in the adhesive industry

Company Philosophy: Continuous Creation of Value for Customers and Society.

Company Values: Responsibility, Devotion, Efficiency, Innovation, Excellence

Services Promise: Provide customers with all sincere after-sales service. Co Pro SI SI

0

Na

P\

QU SE

CONTENTS

COMPANY PROFILE

ompany Introduction	01
oduction Workshop	03

HOME& OFFICE ADHESIVES

JPER GLUE Aluminum Tube Series	07
JPER GLUE PE Bottle Series	10
ower Tack	12
aper Glue	15
boxy Adhesive	17
I Purpose Glue	19
noe Adhesive	20
licone Sealant	21

COSMETIC GLUE

ail Glue Series	22

INDUSTRY BONDING CYANOACRYLATE High Performance Industry Adhesive 25 HOPSON Bulk Cyanoacrylate 28 Specialized Industry Adhesive 30

34

UALITY CONTROL & FACILITY	35
ERVICE PROCESSES	36



COMPANY INTRODUCTION

NINGBO HOPSON CHEMICAL INDUSTRY CO., LTD is specialized in manufacturing cyanoacrylate adhesive, PVC cement and automotive interior adhesive. HOPSON expert team work closely with every customer to pursue the common goal that we provide our valued clients with premium personalized bonding solution.

With top analysis & test device, HOPSON professional chemical engineers have been doing continuous research & development to ensure the products are of good performance. From raw material inspection, production process control, quality testing, packaging through to shipping, each step will be strictly controlled. Besides, we grow with customers together and we want to contribute to the growth by constantly exceeding expectations, always adding values, and most importantly - never making excuses.

HOPSON is committed to supplying environmental friendly superior adhesives no matter from the production process or application in use, environment protection and customer care are our first principle. HOPSON branded products are exported globally with a good reputation among our customers worldwide. Currently, we have agents in Europe, America, South Korea, Russia and Southeast Asian countries.

Environment Friendly Adhesive Manufactory








PRODUCTION WORKSHOP

Hopson Chemical is a leading professional manufacturer of adhesives and sealants, plastic vessels, which has been always dedicated to the research and development of various functions and applications in adhesives for the past 12 years.



BULK PRODUCTION >





INTERMEDIATE < CONTROL



CONFIRM RELEASE



FINAL INSPECTION



HOME&OFFICE ADHESIVES SUPER GLUE





1.1 SUPER GLUE Aluminum Tube Series

HOPSON super glue is a single-component cyanoacrylate monomer in the liquid state capable of extremely rapid polymerization between adherent surfaces, resulting in extremely strong and structural bonds at room temperature.

HOPSON super glue products are suitable for mending dishes and household articles, furniture, fishing tackle and other sports equipment, car fixtures, electronic instruments, stone sculpture, or using on metal, leather or paper.

Application

- Be sure the surfaces to be glued are clean and dry.
 Apply one drop for each 3cm² area. Apply with
- Apply one drop for each 3cm² area. Apply with extreme care. Never spread with fingers.
- Apply to only one for the surface. Quickly place two surfaces together with slight finger pressure. Bond completed is seconds.

Туре	Appearance	Viscosity(cps)	Setting time(s)	Shear Strength (kgf/cm²)	Shelf life(month)
Geneal Purpose	Clear liquid	40-60	15<	120-150	24
General Thicken	Clear liquid	80-120	15<	120-150	24
GEL	GEL	80000-100000	30<	180-200	24

[<u>@</u>]

0

ß



EX	SUPER GULE		
TH	Item No.	HCA-101	
	Packing	3g*1pcs/card, 24cards/box, 12boxes/ctn	
	G.W.	6.5kgs	
Q	CTN	37.5*28.5*38cm	

NO.1102		GULE
ULTIMATI STREAM	Item No.	HCA-102
	Packing	3g*2pcs/card , 24cards/box, 12boxes/ctn
	G.W.	7.5kgs
Net.3gx2	CTN	42.5*40*38cm

E DARKER STANLE	
FAST FIA GEL UNITED WILL SAUS JUNIT	

EAST FIL

		N
J	FAST FI ULTINAT STRENGT	E
	M	
	Rousen	÷

NO.1105 SUPER GULE

TX .		
TE	Item No.	HCA-103A
	Packing	1g*3pcs/card, 24cards/box, 12boxes/ctn
	G.W.	5.8kgs
	CTN	37.5*28.5*38cm
20		

	NO.1107 SUPER GULE	
HARVERAL INSTANT ADMESTRY	Item No.	HCA-103C
	Packing	1g*2pcs +3g*1pcs/card , 12cards/box , 24boxes/ctn
	G.W.	7.3kgs
	CTN	34.5*40*43.5cm

hopson Super GLUE MINICA MENDARMAN	NO.1103 SUPER (GULE GEL
PAST PAST	Item No.	HCA-G101
APPLICATIONS P SEA O LUTOS D CORS D CORS	Packing	3g*1pcs/card, 24cards/box, 12boxes/ctn
	G.W.	6.5kgs
Птоксын	CTN	37.5*28.5*38cm
Net.3g		



NO.1106 SUPER GULE

Item No.	HCA-103B
Packing	1g*3pcs/card , 12cards/box , 24boxes/ctn
G.W.	6.5kgs
CTN	40*38*40cm



NO.1104 SUPER GULE PLUS

Item No.	HCA-X02
Packing	3g*2pcs/card , 24cards/box, 12boxes/ctn
G.W.	7.5kgs
CTN	42.5*40*38cm



NO.1111 SUPER GULE GEL

Item No.	HCA-G103
Packing	1g*3pcs/card, 24cards/box, 12boxes/ctn
G.W.	5.8kgs
CTN	37.5*28.5*38cm









NO.1108 SUPER GULE		
Item No.	HCA-112A	
Packing	3g*12pcs/card, 24cards/ctn	Net3g
G.W.	4.1kgs	Not3g
CTN	35*18*38.3cm	ho
NO.1109 SUPER GULE		
Item No.	HCA-112B	Not.3g
Packing	Full Blister 3g*12pcs/card , 50cards/ctn	ho
G.W.	7.8kgs	ho
CTN	40*35*38.3cm	
NO.1110 SUPER GULE		

Item No.	HCA-112C
Packing	3g*12pcs/card, 50cards/ctn
G.W.	7.5kgs
CTN	63.5*39*13.5cm



SUPER GLUE PE Bottle Series

HOPSON super glue is a single-component cyanoacrylate monomer in the liquid state capable of extremely rapid polymerization between adherent surfaces, resulting in extremely strong and structural bonds at room temperature.

HOPSON super glue products are suitable for mending dishes and household articles, furniture, fishing tackle and other sports equipment, car fixtures, electronic instruments, stone sculpture, or using on metal, leather or paper.

Application

- Be sure the surfaces to be glued are clean and dry.
- Apply one drop for each 3cm² area. Apply with extreme care. Never spread with fingers.
- Apply to only one for the surface. Quickly place two surfaces together with slight finger pressure. Bond completed is seconds.

Туре	Appearance	Viscosity(cps)	Setting time(s)	Shear Strength (kgf/cm²)	Shelf life(month)
Geneal Purpose	Clear liquid	2-3	10<	120-150	12
General Thicken	Clear liquid	80-120	15<	120-150	12



HOME& OFFICE ADHESIVES







NO.1202 **SUPER GULE**

Item No.	HCP-102
Packing	2g*1pcs/card, 24cards/box, 12boxes/ctn
G.W.	6.7kgs
CTN	47*28.5*38cm



NO.1203 **SUPER GULE PEN**

Item No.	HCP-103
Packing	3g*1pcs/card , 24cards/box , 12boxes/ctn
G.W.	7.5kgs
CTN	48*29*38cm

hopson Super glue Super glue	NO.1204
FAST FIX	Item N
APPLICATIONS DE VECK DE VECK MINIS DE LEORE DE VECK	Packir
	G.W.
Net.5g	CTN

ho

NO.1204 SUPER GULE		
Item No.	HCP-104	
Packing	5g*1pcs/card , 24cards/box , 12boxes/ctn	
G.W.	7.5kgs	
CTN	49.5*32.2*38cm	



NO.1205 **SUPER GULE** Item No HCP-105

item No.	HCP-105
Packing	10g*1pcs/card , 12cards/box, 24boxes/ctn
G.W.	9.3kgs
CTN	41.2*42.8*38cm

SUPER GLUE	NO.1206 SUPER GULE	
FAST FIX	Item No.	HCP-106
s Topson	Packing	20g*1pcs/card, 12cards/box, 12boxes/ctn
	G.W.	6.8kgs
	CTN	40*34*38cm
LIUUIU		



1.HOPSON POWER TACK

HOPSON power tack - the clever alternative to pins, tape and thumbtacks! HOPSON power tack is a reposition, reusable for quick, clean bonding. It will attach small objects to virtually all surfaces, e.g. walls, furniture and window. It has thousands of uses all around the home, school and office.

Stick posters, seal around windows or doors, clean dust and hair from clothing, keep pictures frames straight. Use HOPSON power tack no non-porous surfaces, painted surfaced, vinyl coated wall paper, glass, metal etc. Ensure they are clean, dry, free from grease and loose materials. Take care when removing after a period of months. Do not use for heavy objects. Recommendations are a guide only.

Application

- Pull off small pcs.
- Knead until soft.
- Apply to the item to be fixed.
- Pressing firmly to the surface.





NO.1207 SUPER GULE		
Item No.	HCP-107	1
Packing	3g*12pcs/card, 24cards/ctn	

G.W.	4.7kgs
CTN	42*25*36cm





2	
\cap	
~	
>	
\geq	
Т	
~	
_	
~	
1	
\cap	
\sim	

hopson	NO.1301 POWER	TACK
	Item No.	HPT-101
	Packing	15g/card , 24cards/box , 12boxes/ctn
	G.W.	8.7kgs
15	CTN	30*21.5*32.5c

		NO.1302 POWEF
	NON TOXIC EARY TO USE	Item No
, box, ′ctn		Packing
	HI COM	G.W.
32.5cm		CTN

NO.1302 POWER TACK		
Item No.	HPT-102	
Packing	90pcs/card, 12cards/box, 12boxes/ctn	
G.W.	10.5kgs	
CTN	38.5*22.5*24.5cm	



NO.1303 POWER TACK		
Item No.	HPT-103	
Packing	35pcs/card, 24cards/box, 8boxes/ctn	
G.W.	13.2kgs	
CTN	45*33*18.5cm	

K	hopson	NO.1304 POWER	TACK
Г-103	POWER TACK	Item No.	HPT-104
cs/card, ards/box, xes/ctn		Packing	50g/card , 24cards/box , 8boxes/ctn
2kgs		G.W.	14kgs
33*18.5cm	50,	CTN	45*33*18.5cm

ho



	NO.1305 POWER	TACK
	Item No.	HPT-105
R	Packing	75g/card, 12cards/box, 12boxes/ctn
Call	G.W.	15kgs
750	CTN	38.5*22.5*24.5cm

2.HOPSON GLUE DOTS

HOPSON Glue dots are pressure-sensitive adhesive dots, used in various different applications, such as sticking credit cards to paper, arts and crafts, and as a safe adhesive for children to use, without needing a hot glue gun. Glue dots are globules of adhesive, which allow attachments to float above a page. They provide a clean and instant bond and are often a more suitable solution than hot or liquid glues or adhesive tapes.

HOPSON Glue dots leave much less mess, residue, and odor which help present a product in the best way, whilst increasing productivity and reducing costs. Removable glue dots also allow you to create a bond which can be removed when needed.

Application

- Point of purchase display assembly
- Adhering matting in picture frames
- Sealing and resealing food & beverage cartons Sign and display manufacturing
- Building (gluing) pocket/presentation Folders
- Make a non-adhesive product, adhesive



hopson	NO.1501 GLUE DOTS	
GLUE DOTS	Item No.	HGD-001
Coar and may to apple Coar and many to apple Coar and many to apple Coar and many to apple Coard and a starting to apple	Packing	60pcs/card , 24cards/box , 12boxes/ctn
anturkaps	G.W.	3.5kgs
()	CTN	31.5*22.5*35cm

- Assembling sample books
- Securing items prior to shrink wrapping
- Securing items within clamshells
- Joining sheeting, films, liners, papers, etc.





NO.1502 GLUE DOTS

HGD-002
Roll Pack 100pcs/card , 20cards/box , 8boxes/ctn
5.0kgs
31.6*36.3*31.5cm

Paper Glue

1.HOPSON GLUE STICK

HOPSON glue sticks Featuring a super-strong formula that quickly sets a strong, permanent bond, they're the perfect all-purpose glue sticks for craft projects.

HOPSON glue adheres to a wide variety of craft materials including paper, wood, fabric and foam board. The ideal scrapbooking glue, it applies and dries clear and features a washable, acid free and non-toxic formula.

Application

They can be used for craft and design, office use and school. There are now varieties that are permanent, washable, acid-free, non-toxic, solvent free, and dyed (e.g. to see where the glue is being applied easier) varieties. These are most commonly used today.





NO.1401 HGS-001

PAPER GLUE

NO.1402 HGS-002



NO.1403 HGS-003

ltem No.	HGS-001	HGS-002	HGS-003
Packing	8g*1pcs/card, 12cards/box, 12boxes/ctn	8g*2pcs/card, 12cards/box, 12boxes/ctn	21g*1pcs/card, 12cards/box, 12boxes/ctn
G.W.	4.6kgs	7.8kgs	7.7kgs
CTN	26.7*26.1*33cm	32*26.7*33cm	34*31.5*33cm

2.WHITE GLUE

White glue is an aliphatic rubbery synthetic polymer with the formula (C4H6O2)n. It belongs to the polyvinyl esters family, with the general formula -[RCOOCHCH2]-. It is a type of thermoplastic. As an emulsion in water, PVAc emulsions are used as adhesives for porous materials, particularly for wood, paper, and cloth, and as a consolidant for porous building stone, in particular sandstone.

Application

- Ideal for arts, crafts, and school projects like envelope adhesive, wallpaper adhesive
- Suitable for craftboard ,wood ,fiber etc.
- Suitble for children over three years old
- Applicable for home school office



WHITE GLUE

Item No.	HWG-001	HWG-002	HWG-003	HWG-004
Packing	60g/pcs, 24pcs/box, 12boxes/ctn	120g/pcs, 12pcs/box, 6boxes/ctn	250g/pcs, 12pcs/box, 3boxes/ctn	500g/pcs, 12pcs/ctn
G.W.	20kgs	11kgs	10.5kgs	7.5kgs
CTN	49*36*25.5cm	37*21.5*33.7cm	46.9*25.8*20.5cm	27*29*24.5cm

EPOXY ADHESIVE

Epoxy Adhesive

HOPSON Two-part adhesive based on epoxy resins. Transparent resin and hardener. For bonding metals, crockery, glass, wood, china, crystal, pearls, ivory, precious stones and various plastics, such as polyester, bakelite, formica, rigid polystyrene and plexiglass.

HOPSON Clear Epoxy Syringe. The one time use syringe makes it simple to dispense and mix without making a mess, is easy to use and bonds to almost any surface. This Clear Epoxy Syringe is one of many top quality items in our Epoxy Adhesives. Good at frost, moisture and chemicals resistance.



Application

- Clean and dry the surfaces to be bonded. For smooth surface, you'd better to sand grind it first.
- Squeeze out equal volume of adhesive liquid and solidification agent, then mix them evenly with blending board and use immediately.
- Apply the blended adhesive on the surfaces of material or appliance to be bonded and mended. It can be solidified in five minutes after the surface is bonded together at room temperature. The things bonded may be used in three hours.





EPOXY ADHESIVE		
Item No.	HEP-001	
Packing	3+3ml/card, 12cards/box, 12boxes/ctn	
G.W.	6.0kgs	
CTN	31.5*31.5*37cm	

NO.1701



NO.1702 **EPOXY ADHESIVE**

Item No.	HEF
Packing	6+6 12ca 12b
G.W.	10k
CTN	46.5



EPOXY ADHESIVE

Item No.

Packing

G.W.

CTN

HEP-004

7+7ml/card,

12cards/box,

12boxes/ctn

37.5*35*49cm

12kgs



NO.1705 **EPOXY PUTTY**

	Item No.	HEF
	Packing	50g/ 12ca 12bo
	G.W.	13ką
	CTN	39.5

HOME& OFFICE ADHESIVES



P-002

6ml/card, cards/box. boxes/ctn

kgs

5*37.5*44cm



NO.1703 **EPOXY ADHESIVE**

Item No.	HEP-003
Packing	12+12ml/card, 12cards/box, 12boxes/ctn
G.W.	16kgs
CTN	46.5*38*47cm

P-005

/card, cards/box, boxes/ctn

gs

5*36.5*40cm



NO.1706 **EPOXY PUTTY**

Item No.	HEP-006.
Packing	25g/box, 20boxes/card, 12cards/ctn
G.W.	14kgs
CTN	32*25*24cm

All Purpose Glue

HOPSON all purpose glue with bond formed is elastic, thus can absorb material tensions waterproof and resistant to have heat diluted, acids and alkalis.

Application

- Surfaces to be glued must be dry clean and free from grease.
- Apply adhesive evenly into both surfaces to be bonded.
- Wait for about 10 to 15 minutes until the adhesive feels dry. Firmly paste both surfaces together. The strength of bond is determined by the amount of pressure applied, but not by the bonding duration.





NO.1801 **ALL PURPOSE GLUE**

Item No.	HAP-001
Packing	7ml/card, 12cards/box, 24boxes/ctn
G.W.	6.0kgs
CTN	37*29.5*35cm



NO.1803 ALL PURPOSE GLUE		
Item No.	HAP-003	
Packing	30ml/pcs 24pcs/box,	

Packing	24pcs/box, 12boxes/ctn	
G.W.	13kgs	
CTN	39*36.5*29.5cm	

NO.1802 ALL PURPOSE GLUE Item No. HAP-002

Packing	7ml*12card 50cards/ctn
G.W.	8.5kgs
CTN	63.5*39*13.5cm





Shoe Adhesive

HOPSON Shoe Adhesive the versatile power glue for many materials: wood, veneer, leather, rubber, glass, china, metal, felt, cork, hard pvc, soft foam and many other plastics.

Application

- Be sure the surfaces to be glued are clean and dry.
- Apply one drop for each 3cm² area. Apply with extreme care. Never spread with fingers.
- Apply to only one for the surface. Quickly place two surfaces together with slight finger pressure. Bond completed is seconds.



NO.1901 **SHOE ADHESIVE**

Item No.	HSA-001
Packing	15ml/card, 12cards/box, 24boxes/ctn
G.W.	9.0kgs
CTN	46.7*43*34.6cm









Item No.	HSA-002
Packing	30ml/pcs, 24pcs/box, 12boxes/ctn
G.W.	13kgs
CTN	39*36.5*29.5cm

HOPSON RTV Slicone Sealant is a single component, low modulus, acetic (neutral) cure and high performance silicone sealant. It won't shrink and crack and withstands harsh temperature and aging. It is ideal for window and door frames and siding and plumbing fixtures.

Feature

- Excellent conglutination for glass material
- Short hardening time
- Good performance of cold, heat and weather resistance
- Does not easily yellow



	NO.2002 SILICONE SEALANT		
Hi-Temp RTV	Item No.	HSI-002	
	Packing	75g/card, 12cards/box, 12boxes/ctn	
- CHEY FORMUL - CHARGED CHEY - CHARGED CHEY - HERDER FROM - HE	SPEC.	Clear/ Antibacterial Fishbowl/Car Lamp Application	
	G.W.	15kgs	
Not.75g	CTN	39.5*39*44cm	

NO.2003 NO.2003 SILICONE SEALANT		IE SEALANT
Hi-Temp RTV	Item No.	HSI-003
APPLICATIONS	Packing	85g/card , 12cards/box , 12boxes/ctn
- Statutional - Statutional Statutions - Statutional Statutions - Statutional Statutions - Statutional Statutions - Statutional Statutions - Statutional Statutions - Statutional Statutional Statutions - Statutional Statutions - Statutional Statutions - Statutional Statutional Statutions - Statutional Statutional Statutions - Statutional Statutional Statutional Statutional Statutions - Statutional Statutione Statutiona Statutiona Statutiona Statutiona Statut	SPEC.	Black/High Temperatur Resistant. Motorcycle/Car cylinder Application
	G.W.	16.5kgs
Net.85g	CTN	39.5*39*44cm

3-5	NO.2004 SILICONE SEALANT			
	Item No.	HSI-004		
SON	Packing	300ml/pcs, 24pcs/ctn		
	SPEC.	White/Clear/Black Construction Application		
300ml	G.W.	8.3kgs		
	CTN	20*25*30cm		



HOPSON Nail Glue is without hydroquinone, and contents of chlorine is less than 100ppm. It's all approved by with the European and USA cosmetic standard. With the high bonding performance, quick setting and long lasting. It won't damage the nail.

Feature

- Adheres to nails & nail tips in seconds.
- Quick setting and long lasting.
- Great for sealing silk wraps.
- No Hydroquinone ingredient which is not allow in Europe.

Application

- Remove polish and clean nails thoroughly.
- Apply one drop of glue to split or broken nails or nail tip and hold the break or tip together with gentle pressure for 10-15seconds.
- Let dry and smooth nails with a file or buffer.
- After each use, wipe applicator tip and replace cap tightly.





	Non and a state
hopson Monson Monson	hooson hopson bouceus hopson bouceus hopson bouceus hopson bouceus hopson bouceus

Item No. HNG-001	
Packing 2g/0.07oz, 1000pcs/box, 50boxes/ctn	
G.W. 19kgs	
CTN 38*37*32cm	



NO.2102 NAIL GLUE CLEAR	
Item No.	HNG-002
Packing	3g/0.11oz, 24cards/box, 12boxes/ctn
G.W.	5.8kgs

CTN

49.5*37.5*26cm

n NAI

	NO.2103 NAIL GLUE PINK		
FAST ENTAGE	Item No.	HNG-002P	
hopson	Packing	3g/0.11oz, 24cards/box, 12boxes/ctn	
Repairs	G.W.	5.8kgs	
Natural Nails Nails Net.3g	CTN	49.5*37.5*26cm	



NO.2104 NAIL GLUE CLEAR		
Item No.	HNG-003	
Packing	8g/0.28oz, 24cards/box, 12boxes/ctn	
G.W.	8.5kgs	
CTN	56*56*35cm	

sa Natural Nails CTN 56*56*35cm		NO.2105 NAIL GLUE PINK		
Packing 24cards/box, 12boxes/ctn & Repairs * & Repairs * & Natural Nails in Nails G.W. 8.5kgs CTN 56*56*35cm	FAST DATING ULTIMATE ULTIMATE	Item No.	HNG-003P	
s & Reparts s & Natural Nails al Nails GCTN 56*56*35cm	and the second se	Packing	24cards/box,	
tal Nails CTN 56*56*35cm	s & Repairs	G.W.	8.5kgs	
	s & Natural Nails cial Nails Net.8g	CTN	56*56*35cm	



HIGH PERFORMANCE INDUSTRY ADHESIVES



High Performance Industry Adhesive

HOPSON High Performance Industry adhesive have excellent bonding strength and fast curing speed with many substrates, including rubbers, plastic, ceramics, wood, metal, leather, fabric, paper, cork and so on. When it used together with primer of H770, it can be also have excellently bonding with PP. PE. AB, Nylon and so on.

Also perform well on dry or porous materials, thereby extending the range of application possibilities.

Feature

- Cure in seconds
- Single component, convenient to use
- High bonding strength, Low odor, low blooming
- Impact and temperature resistance and long shelf life
- Wide temperature range from 50 to 120°C
- Ideal for high speed production . Automatic dispensing equipment readily available.
- Cost effective. Only minimal amounts of adhesives are needed to form strong bonds.

Item No.	Viscosity (cps)	Cure Time Steel-steel (secs)	Temperature Range.(°C)	Gap Fill (mm)	Shear Strength (kgf/cm2)
H201	80 -120	<15	-55 to +82	0.08	160 -180
H206	30 - 50	<15	-55 to +82	0.05	120 -160
H295	80 -100	<10	-55 to +82	0.06	120 -160
H215	30 - 50	<15	-55 to +120	0.05	180 - 200
H254	Thixo Gel	<25	-55 to +82	0.5	180 - 220
H298	80 -100	<15	-55 to +82	0.06	160 -180
H260	30 - 50	<20	-55 to +82	0.04	120 -140
H280	300 - 500	<20	-55 to +82	0.15	140 -180

Cute time, ASTM D 1002/ EN 1465, Tensile Shear Strength, DIN 53288 Testing at 25 C and 50% relative humidity.







H201



80-120cps, medium viscosity, general purpose, surface-insensitive adhesive. Ideal for acidic surfaces, such as wood, rubber, leather materials.



Item No. H295



80-100cps, medium viscosity. Ideal for bonding most kind of plactics, and plastic bonding rubber.

NO.3105 **GEL FOR POROUS** MATERIAL

H254 Item No.



Gel, non-flowing , high bonding strength. Ideal for vertical surface application and porous materials.



NO.3107 LOW ODOR LOW **BLOOMING**

Item No. H260

30-50cps, low viscosity, low odor, low blooming. Ideal for electronic instruments, phones and cosmetic products.

INDUSTRY BONDING CYANOACRYLATE



NO.3102 LOW BLOOMING

H206 Item No.

30-50cps, low blooming, low viscosity, fast setting time. Excellent for splicing O-Rings, rubber materials, and rubber bonding metals.



hopson

NO.3104 FOR METALS

Item No. H215

30-50cps, low viscosity, fast setting, impact resistant, high temperature resistant for 120°C. Ideal for bonding metals

NO.3106 FOR FLEXIBLE **MATERIALS**

Item No.

80-100cps, medium viscosity, fast setting, flexible. Ideal for leathers, rubber and plastics.

H298

NO.3108 **BLACK/RUBBER** TOUGHENED

Item No. H280

300-500cps, black, medium viscosity, low blooming, rubber toughening, impact resistant. Ideal for rubber parts, black plastics and electronic instrument.



NO.3109 **INDUSTRIAL INSTANT SUPER GLUE GEL**

Item No.	H2542
Packing	20g/pcs, 24pcs/box, 12boxes/ctn
G.W.	10.5kgs
CTN	41*31.5*29cm

NO.3202

Item No.

ACTIVATOR

H712

HOPSON H712 is solvent-based

rylate adhesive curing velocity. Adhesives achieving immediate

contact. Suitable for working in

unfavourable conditions of

for highly porous materials.

activator for accelerating cyanoac-

temperature and humidity. Suitable

ACCESSORY



NO.3201 PRIMER

H770 Item No.

HOPSON H770 is solvent-based PE, PP primer, can improve difficult to bond surfaces, such as PE, PP, Silicone Rubber, TPR, EPDM. It is suitable to bond with HOPSON cyanoacrylate adhesive.





NO.3203 **BONDING REMOVER**

Item No. H790

HOPSON Cleaner remove cured cyanoacrylate adhesive from skin, products, or assembly tool.H790 won't etch most plastics or paints, it's better to test a small area before using. Low odor, low corrosion.



NO.3204 **ACCELERATOR FOR MDF SPRAY**

H715 Item No.

ACTIVATOR H715 is a single component CFC-free solvent based surface activator. The activator is designed to promote the speed of cure of HOPSON cyanoacrylate adhesive. It used for furniture of MDF kit.

HOPSON Bulk Cyanoacrylate

HOPSON Cyanoacrylate offered bulk packing by 20kg, 25kg and 1 tons . Our standard cyanoacrylate monomer is a high-quality, 100% purity. We also offer European Standard grade which approves by Rohs and REACH certificate . We can offer customized grade cyano with special curing time, viscosity & bonding strength to meet your strictly requirements .

All adhesives leaving our facilities have been through our intensive guality control system. Each batch has been throughly tested to meet the highest standards.

Feature:


General Purpose / Woodwork, plastic, rubber and especially for acidic woods

Grade	Chemical Type	Viscosity (CPS)	Gap Fill (mm)	Cure time (Sec.)	Shelf Life (Month)	Tensile-Shear Strength (kgf/cm2)
H 105	ETHYL	2-3	0.04	3-5	6	120~160
H 106	ETHYL	2-3	0.04	5-8	8	140~180
H 108	ETHYL	2-3	0.04	10-12	12	140~180
H 109	ETHYL	8-10	0.05	10-15	12	140~180
HV-50	ETHYL	40-60	0.06	10-15	12	140~180
HV-100	ETHYL	100	0.10	15	12	140~180
HV-300	ETHYL	300	0.15	15	12	140~180
HV-1500	ETHYL	1500	0.20	15	12	150~200
HV-GEL	ETHYL	GEL	1	30	12	180~220

Cute time, ASTM D 1002/ EN 1465, Tensile Shear Strength, DIN 53288. Testing at 25 C and 50% relative humidity.







1.Woodworking Cyano





INDUSTRY BONDING CYANOACRYLATE



SPECIALIZED INDUSTRY ADHESIVE

W-20 FOR WOOD REPARE

Fast Grade, 3 second, 100% Purity, High Bonding Strength, No yellow change on wood.

W-50 FOR HARD WOOD BONDING

FOR HARD WOOD BONDING. Fast Grade, Extra Bonding Strength, 100% Purity.

W-1500 FOR FURNITURE AND MDF KIT


With accelerator H715, it is easy to use, fast bonding speed and high Bonding strength.

2.Flex Banner Adhesive



F-20

Suitable for bonding flex banners, and flex banner bonding metals. It is fast setting time, easy application and high bonding strenghth.



3.Hardware Specialized Adhesive



H-20

Hardware Specialized Adhesive is a kind of high-performance instant adhesive specially for the die industry, and metals bonding. With fast setting time, high strength, high temperature resistance, long shelf life.



4. Magent Specialized Adheisve



M-20

HOPSON magnet adhesive is a kind of high performance instant adhesive specially used for cutting magnetic materials. Vibration resistance, water resistance, and with long shelf life.



5. Shoe & Leather Specialized Adhesive



S-20

soft materials such as leather, rubber, and shoes.

6.Low Odor 3D Print Adhesive



D-20

Low viscosity, low odor, low blooming, medium drying time. Specialized for infiltration 3D printing materials.

7.Electronic Specialized Adhesive



E-20

Electronic specialized adhesive is low blooming, low odor and medium setting time. It is specialized for electronic instruments and full-auto assembling system.

Ultra-soft, non-brittle, fast setting time, high bonding strength. It's specialized for bonding







8.Toy Industry Adhesive.





HOPSON Toy industry adhesive is specialized for all kind of plastic toys, wood toys. With low odor, low blooming and fast setting time. It can pass all kind of Rohs testing.



9.Medical Device Specialized Adhesive



ME-20

Low viscosity, flexible, impact resistance, specialized for medical device bonding. Such as medical plastics and metals. ISO-10993 certificated.



10.Customized Adhesive

Customization can be made to meet the needs of bonding materials in different industries, such as plastics, rubber, electronics and medical treatment.







PVC CEMENT

HOPSON PVC Cement is mono-component solvent glue with vinyl polymer as main material and is special adhesive for bonding hard PVC. It can also be used for self-bonding and mutual bonding of materials such as ABS, AS, polystyrene, organic glass and polycarbonate. It's used for PVC, UPVC, CPVC pipes, for Cold and Hot Water Systems. It's fitting with advantage of easily spread, quick dry, anti-corrupt, anti-hot water and high strengthen, etc.

Usage

It is applied uniformly on single side or double side of bonding surface that is dry and without oil for immediate bonding and close contact. It is not allowed to glue after drying. Location can be fixed in 5 minutes and certain levels of strength can be achieved in 2-3 hours and maximum strength can be reached in 24 hours.

Notes:

This item is flammable and should be kept in cool and ventilating area and must be stored andt ransported according to the rules for flammable articles. When in use, attention must be paid to ventilation and prevention of contact with fire.





PVC CEMENT

CPVC CEMENT

Item No.	HPV-616	Item No.	HPV-636
Packing	118ml/473ml , 4oz/16oz 48tins/ctn, 24tins/ctn.	Packing	118ml/473ml, 4oz/16oz 48tins/ctn, 24tins/ctn.
G.W.	2.3kgs/13.5kgs	G.W.	2.3kgs/13.5kgs
CTN	34.5*23*17.7cm/ 35.5*26.5*25.5cm	CTN	34.5*23*17.7cm/ 35.5*26.5*25.5cm

m

PVC PRIMER

Item No.	HPV-333
Packing	118ml/473ml , 4oz/16oz 48tins/ctn, 24tins/ctn.
G.W.	2.3kgs/13.5kgs
CTN	34.5*23*17.7cm/ 35.5*26.5*25.5cm






QUALITY CONTROL & FACILITY


We have our research and development team to improve our technology continuously. We use advanced inspection equipments to test the content of high molecular material, addition agent and impurity. Guarantee always best quality offered to our clients.



SERVICE PROCESSES

PRODUCTION PROCESS

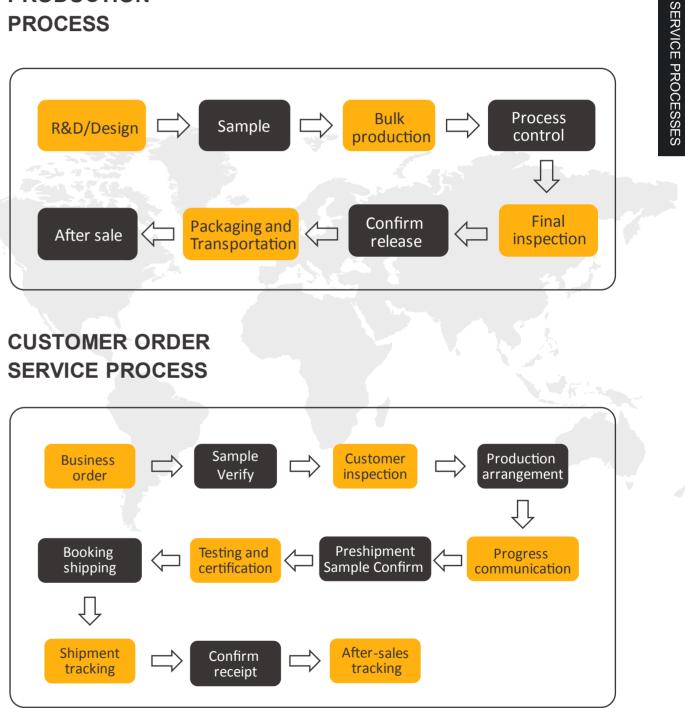

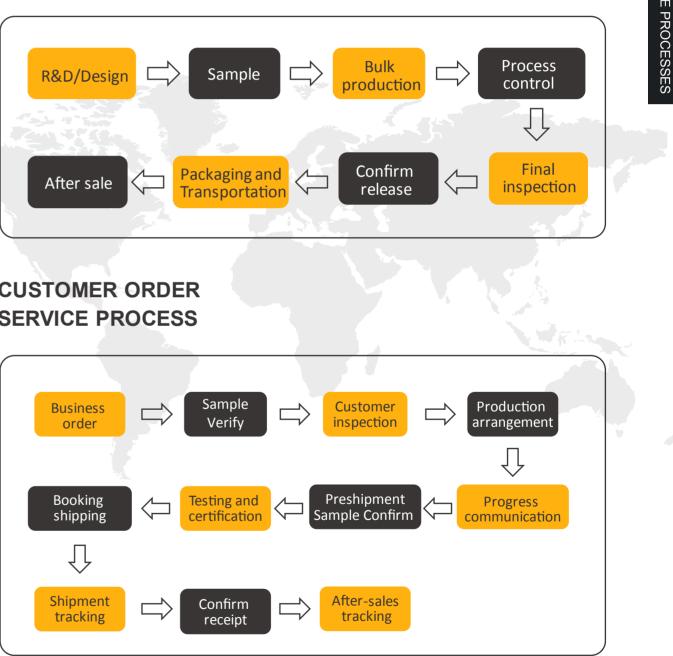

SERVICE PROCESSES